


LA 25 M

0.5 to 500 MHz LINEAR AMPLIFIER MODULE

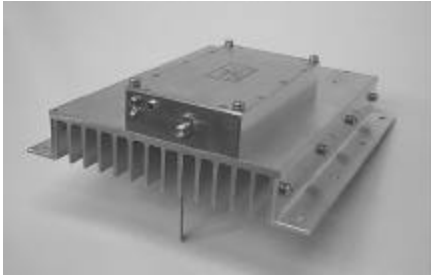

25 Watts of Linear RF Power From 0.5 MHz to 500 MHz For Industrial, Laboratory, Communication and Medical Applications.

FEATURING:

- 0.5 MHz to 500 MHz
- 25 W Linear
- 50 W Saturated
- Linear Output of 12.5W with h3£ - 25 dBc

Class Of Operation

Class A

Frequency Of Operation

0.5 MHz to 500 MHz

RF Power Output

50 W saturated

Gain

44 dB ±1 dB

RF Input Drive

Typical range -20 dBm to 5 dBm

Input Drive Source

Signal or function generator, analog computer input capable of up to 2 Vp-p @ 50 Ohm within amplifier output and bandwidth limits.

Input and Output Impedance

50 Ohm

Input VSWR

2:1 max

Output VSWR

3:1 max

Load Mismatch

All phase angles

Harmonic Level @ 12.5 W

Better then - 25 dBc for 3rd harmonic, any other > -30 dBc

RF Connectors

SMA Females

AC Power Source

28 VDC, 9A

AC Power Connection

RFI Filter solder stud

Cooling

Forced Air Required

Module Dimensions

(H 70 x W 208 x L 240) mm
(2.8" x 8.2" x 9.05")

Weight

~ 2 kg, (4.4 lbs.)



Mounting

Right Angle Brackets with 7.4" side to side hole pattern. 2.75" between holes on bracket

Operating Temperature

0° to 35° C ambient air

LA 25 Performance Chart

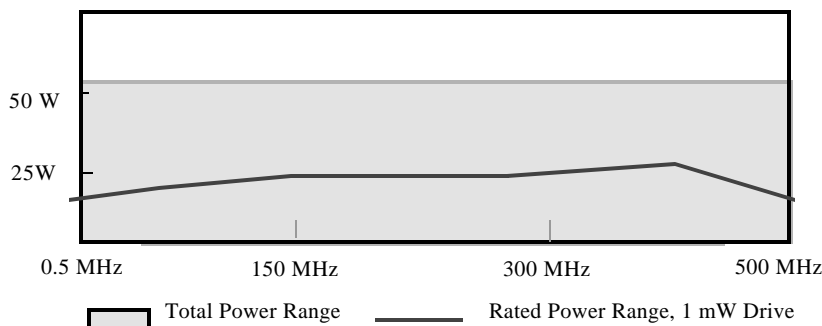

Sales Representative:



T&C Power Conversion, Inc.

110 Halstead Street, Suite 7

Rochester, NY 14610, USA

Tel: 585-482-5551

Fax: 585-482-8487

<http://www.TCPowerconversion.com>